



DEANSTEEL

Marine Doors and Frames

A0 / A15 / A30

IMO

SPECIFICATIONS

Frame	16GA. Cold-rolled steel
Door	16GA. 3-inch thick
Paint	Prime painted
Hinges	Stainless Steel Sealed Ball-bearings
Insulation	Marine Wool
Lock	Mortised Lock

OPTIONS

Door Types	F and V
Frame	14GA. 10GA. Z Frame
Paint	Baked Enamel
Galvannealed Steel	ASTM A653/A653M-A60
Vision Panel	Contraflam 10" x 10"
Hinge	Stainless Steel Continuous Pin and Barrel w/SS Bearings
Lock	3 Point Mortise Stainless Steel Panic Device
Customizations	Size, Hardware, Features, and Weather-tight Applications



CERTIFICATIONS

IMO / FTP

U.S.C.G. #164.136/114/0


DeanSteel Manufacturing Company
931 S. Flores Street
San Antonio, TX 78204

P 800.825.8271
F 210.226.0913
www.DeanSteel.com




MADE IN AMERICA
AND VETERAN OWNED


Door Types

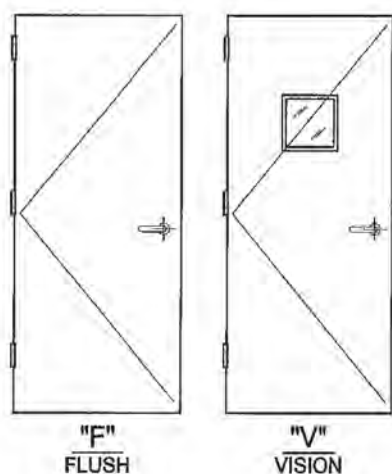


Frame Elevations

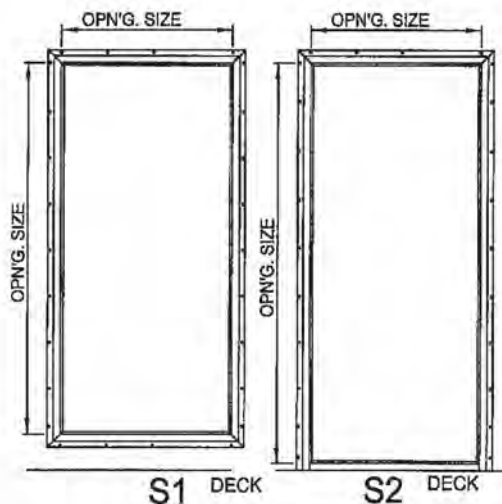

Frame Types

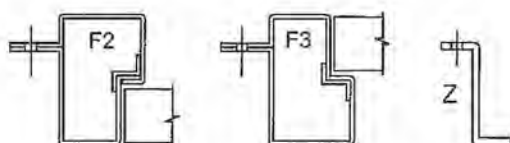

FLANGE MOUNTED FRAMES

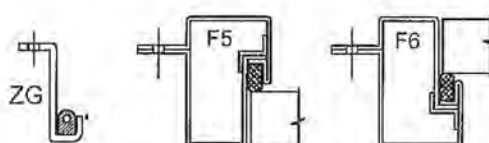

Flange Mounted Intergral Gasket Frames
(for Fume tight & Weather tight)

DOOR HANDING CHART							
SINGLE DOORS				PAIR of DOORS			
INSIDE F2 or F5 IN SWING ONLY				INSIDE F2 or F5 IN SWING ONLY			
	RIGHT HAND	RH	INSIDE		RIGHT HAND ACTIVE	RH ACT	INSIDE
	LEFT HAND	LH	INSIDE		LEFT HAND ACTIVE	LH ACT	INSIDE
INSIDE F3 or F6 OUT SWING ONLY				INSIDE F3 or F6 OUT SWING ONLY			
	RIGHT HAND REVERSE	RHR	INSIDE		RIGHT HAND REVERSE ACTIVE	RHR ACT	INSIDE
	LEFT HAND REVERSE	LHR	INSIDE		LEFT HAND REVERSE ACTIVE	LHR ACT	INSIDE

NOTE:
ALWAYS USE THE KEY SIDE
OF THE DOOR FOR REFERENCE