

A0/A30/A60 | 46-CFR

SPECIFICATIONS

Frame	16GA. Cold-rolled steel
Door	16GA. 1 3/4-in thick
Paint	Prime painted
Hinges	Stainless Steel Sealed Ball-bearings
Insulation	Marine Mineral Wool
Lock	Cylindrical Lock Grade 1 with 3/4-in Latch Projection

OPTIONS

Door Types	F; G; N; V; RV; HP
Frame	14GA. 10GA. Z Frame K. D. Drywall Frame
Paint	Baked Enamel
Stainless Steel	Type 316L ASTM A240 / A240M
Galvanized Steel	ASTM A653/A653M-A60
Vision Panel	TGP FireLite Plus Fire-Rated Glazing
Hinge	Stainless Steel Continuous Pin and Barrel w/SS Bearings
Lock	Mortised Lock with 3/4-in Latch Projection
Bullet Resistant	UL-752 Level 1 – 8
Blast Resistant	Contact Sales Department
Customizations	Stainless Steel Panic Device Hardware, Features, and Weather-tight Applications

** Some options are mutually exclusive*

CERTIFICATIONS

DeanSteel certifies the doors are manufactured in accordance with:

46 CFR 72.05-25
46 CFR 116.435
NVIC 9-97, CH-1




DeanSteel Manufacturing Company
931 S. Flores Street
San Antonio, TX 78204

P 800.825.8271
F 210.226.0913
www.DeanSteel.com




**MADE IN AMERICA
AND VETERAN OWNED**


Door Types

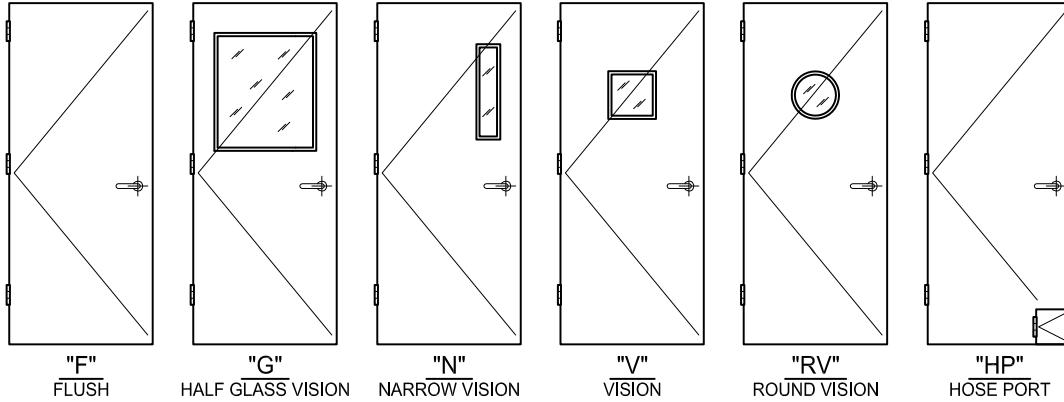

Frame Elevations

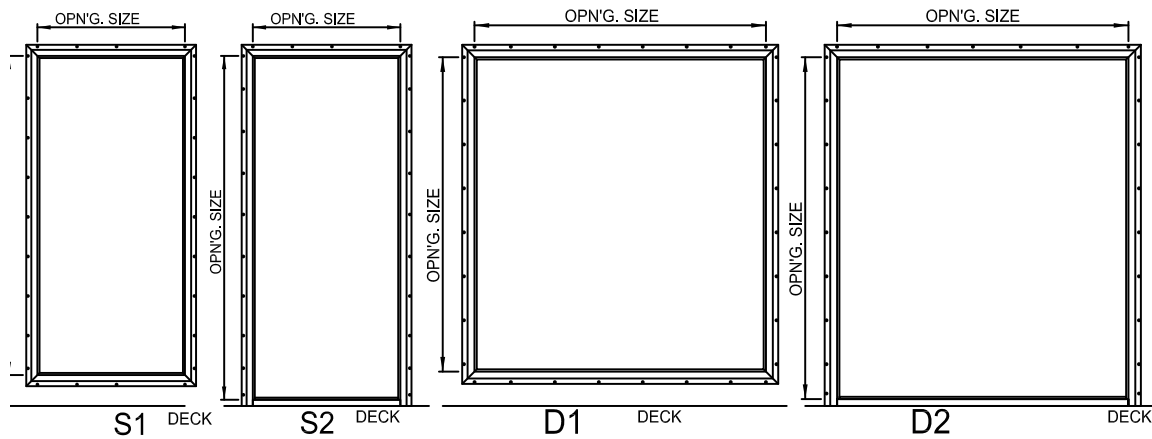

Frame Types

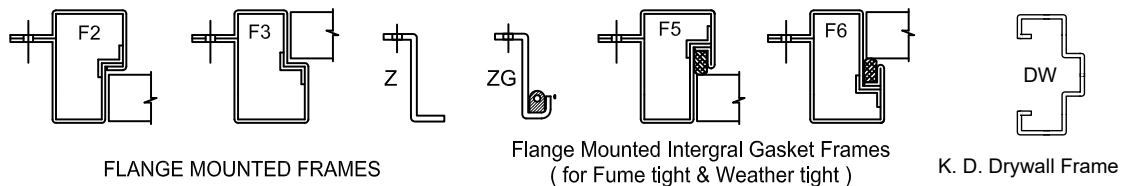

DOOR HANDING CHART					
SINGLE DOORS			PAIR of DOORS		
INSIDE F2 or F5 IN SWING ONLY			INSIDE F2 or F5 IN SWING ONLY		
RIGHT HAND	RH	LEFT HAND	RIGHT HAND ACTIVE LH ASTRAGAL	RH ACT	LEFT HAND ACTIVE RH ASTRAGAL
RIGHT HAND REVERSE	RHR	LEFT HAND REVERSE	RIGHT HAND REVERSE ACTIVE RH ASTRAGAL	RHR ACT	LEFT HAND REVERSE ACTIVE LH ASTRAGAL
INSIDE F3 or F6 OUT SWING ONLY			INSIDE F3 or F6 OUT SWING ONLY		
RIGHT HAND	RH	LEFT HAND	RIGHT HAND ACTIVE LH ASTRAGAL	RH ACT	LEFT HAND ACTIVE RH ASTRAGAL
RIGHT HAND REVERSE	RHR	LEFT HAND REVERSE	RIGHT HAND REVERSE ACTIVE RH ASTRAGAL	RHR ACT	LEFT HAND REVERSE ACTIVE LH ASTRAGAL

NOTE:
ALWAYS USE THE KEY SIDE
OF THE DOOR FOR REFERENCE