

A60 / H60 / H120 | IMO

SPECIFICATIONS

Frame	10 GA. Stainless Steel 316L
Door	12/14 GA. 5 1/2-in thick
	Stainless Steel 316L
	ASTM A240 / A240M
Hinges	DSM Stainless Steel Continuous Hinge
Insulation	Proprietary
Lock	DSM SS 3-point Mortise Lock with Panic Trim

OPTIONS


Door Types	F and V
Door Ratings	H120; H60; H30; or H0
Paint	Prime or Baked Enamel
Galvanized Steel	ASTM A653 / A653M - A60
Hinges	DSM SS Heavy-Duty
Vision Panel	Fire Rated Glazing (Up to H60 only)
Ballistic Resistant	Up to UL 752 Level 3
Jet Fire	Up to J-120
Customizations	Size, Hardware and Features

CERTIFICATIONS

IMO /FTP
U.S.C.G. #164.136/89/0
U.S.C.G. #164.136/101/0




Door Types

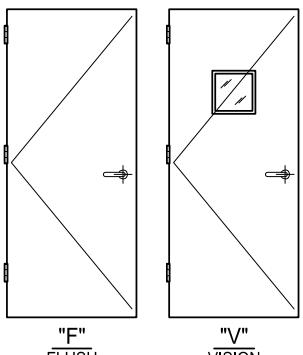

(NOT AVAILABLE
IN H120)

Frame Elevations

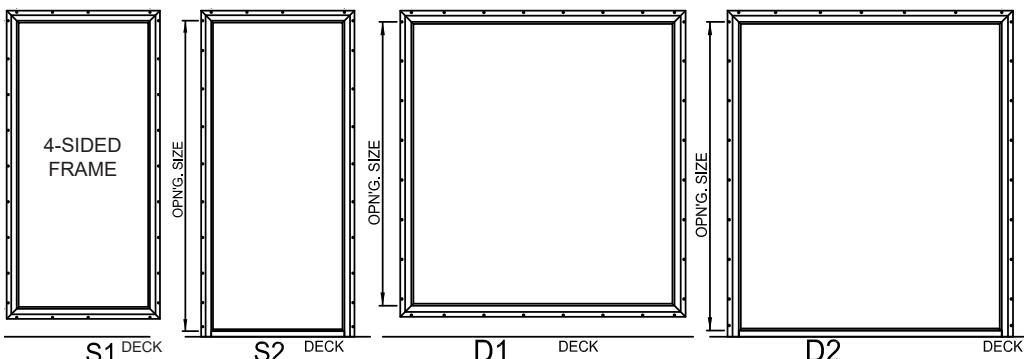

"F"
FLUSH

"V"
VISION



S1 DECK

S2 DECK

D1 DECK


D2

DECK

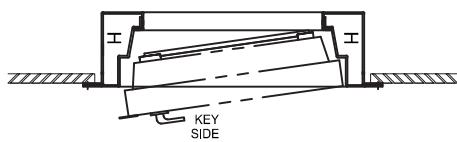

Frame Section H

HEAD, JAMBS & SILL
OUTSWINGING PROFILE

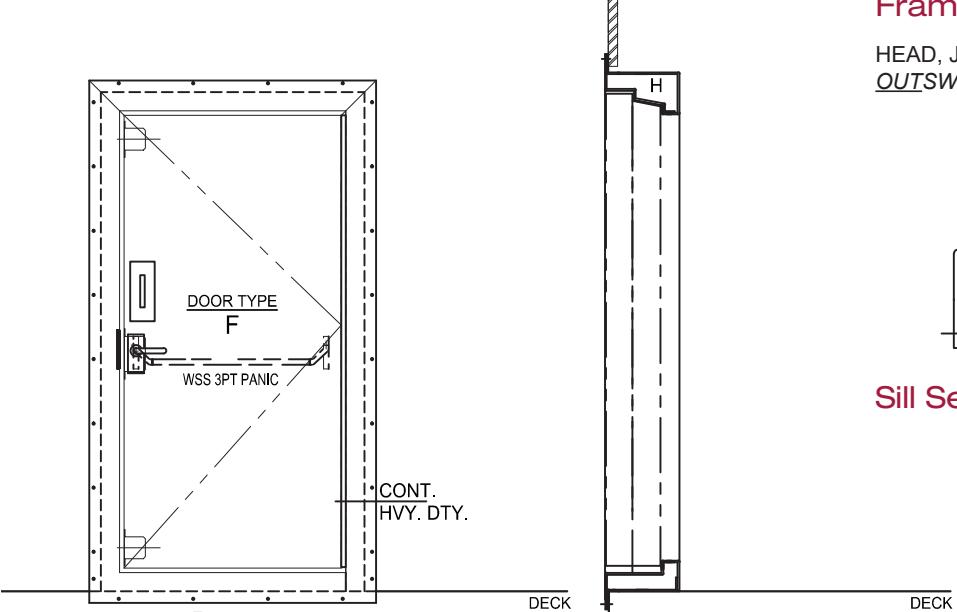

Sill Section BS1A

