

# A60 / H60 / H120 / WT | IMO

## Pair

### SPECIFICATIONS

Frame	10 GA. Stainless Steel 316L
Door	12/14 GA. 5 1/2-in thick Stainless Steel 316L ASTM A240 / A240M
Hinges	DSM HD Stainless Steel
Insulation	Proprietary
Lock	DSM SS 3-point Mortise Lock with or without Panic Trim
Weather Tight	Water Penetration Resistance (ASTM E331) No Leakage @ 2.9 psf
Fume Tight	Air Infiltration (ASTM E283) 0.08 cfm/ft <sup>2</sup> @ 1.60 psf



### OPTIONS

Door Types	F and V
Paint	Prime or Baked Enamel
Vision Panel	10" X 10"
Blast Resistant	Up to 1 Bar (Impulse, door size and blast performance dependent)
Ballistic Resistant	Up to UL 752 Level 3
Rating	H120
Jet Fire	Up to J-120
Sizes (nominal)	(nominal) 6'6" X 7'6" Clear Opening Tallest 74" X 103" Clear Opening Wide 89" X 86" Clear Opening
Customizations	Size, Hardware and Features

### CERTIFICATIONS

U.S.C.G. #164.136/106/0

DeanSteel Manufacturing Company  
931 S. Flores Street  
San Antonio, TX 78204

P 800.825.8271  
F 210.226.0913  
[www.DeanSteel.com](http://www.DeanSteel.com)




MADE IN AMERICA  
AND VETERAN OWNED


**DEANSTEEL**

**A60 / H60 / H120 / WT** | IMO  
Pair

**Door Types**

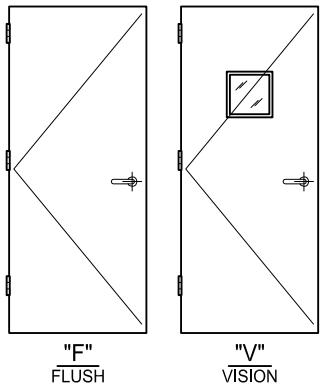

**Frame Elevations**

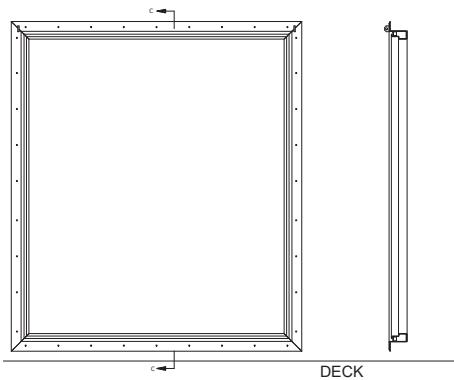

**Frame Section**

