

## A60 / H60 WT | IMO

## SPECIFICATIONS

Frame	10 GA. Stainless Steel 316L
Door	12/14 GA. 5-1/2-inch thick
	Stainless Steel 316L (Matte Finish)
	ASTM A240 / A240M
Hinges	DSM HD Stainless Steel
Insulation	Proprietary
Lock	DSM SS 3-point Mortise Lock
	Optional Panic Trim
Weather Tight	Water Penetration Resistance (ASTM E331) No Leakage @ 2.9 psf
FumeTight	Air Infiltration (ASTM E283) 0.08 cfm/ft <sup>2</sup> @ 1.60 psf



## OPTIONS

Door Types	F and V
Paint	Prime or Baked Enamel
Vision Panel	Fire Rated Glazing
Blast Resistant	Up to 1 Bar (impulse, door size & blast performance dependent)
Ballistic Resistant	Up to UL 752 Level 3
Jet Fire	Up to J-60
Sizes (up to)	(nominal) 47-1/4" x 101-1/4" Clear Opening Tallest 44-3/4" x 117-1/4" Clear Opening Widest 55-1/4" x 96-1/4" Clear Opening
Customizations	Size, Hardware and Features

## CERTIFICATIONS

U.S.C.G. #164.136/100/0


DeanSteel Manufacturing Company  
931 S. Flores Street  
San Antonio, TX 78204

P 800.825.8271  
F 210.226.0913  
[www.DeanSteel.com](http://www.DeanSteel.com)





MADE IN AMERICA  
AND VETERAN OWNED

## Door Types

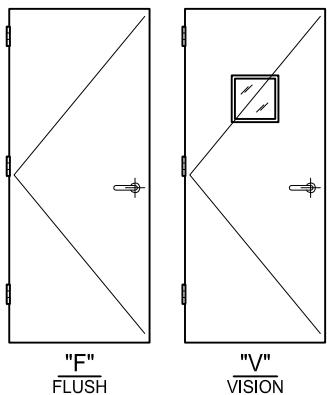

## Frame Elevations

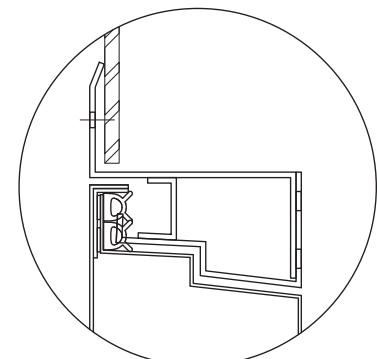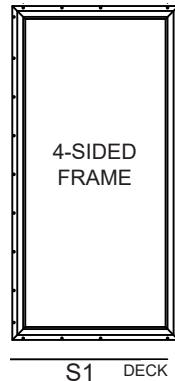

## Frame Section

