

A60

IMO

SPECIFICATIONS

Frame	14 GA. Cold Rolled Steel
Door	14 GA. 3 1/8" thick ASTM A1008 / A1008M
Paint	Prime painted
Hinges	Stainless Steel Lift-Off
Insulation	Fire Rated Marine
Lock	Mortised Lock (3-Point)

OPTIONS

Door Types Frame	F & V
Type	Z, Zg, F2, F3, F5 & F6
Paint	Baked Enamel / Powder Coat
Galvannealed Steel	ASTM A653 / A653M
Stainless Steel Finish	Matte
Vision Panel	10" x 10" Contraflam
Lock	3-Point Mortise Exit Device
Customizations	Size, Feature, Weather-tight and Fume-tight Applications



CERTIFICATIONS

U.S.C.G. #164.136/122/0
U.S.C.G. #164.136/123/0


DeanSteel Manufacturing Company
931 S. Flores Street
San Antonio, TX 78204

P 800.825.8271
F 210.226.0913
www.DeanSteel.com




MADE IN AMERICA
AND VETERAN OWNED


Door Types

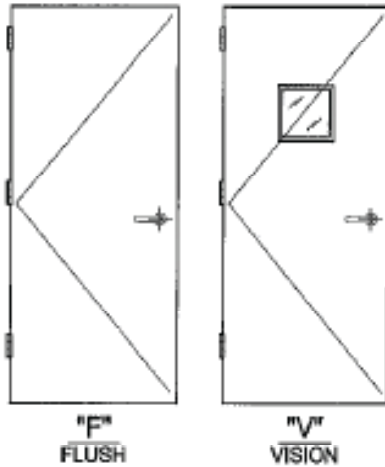


Frame Elevations

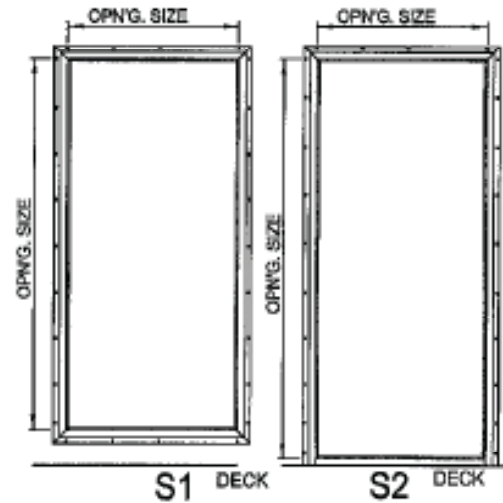

Frame Types

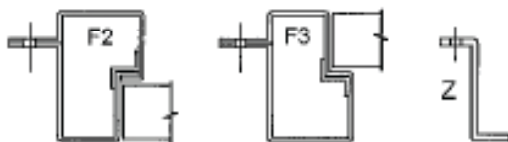

FLANGE MOUNTED FRAMES

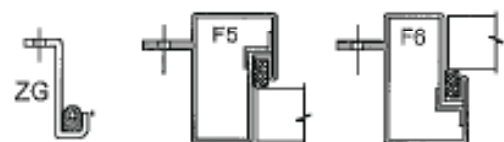

Flange Mounted Integral Gasket Frames
(for Fume tight & Weather tight)

DOOR HANDING CHART							
SINGLE DOORS				PAIR of DOORS			
NOTE : ALWAYS USE THE KEY SIDE OF THE DOOR FOR REFERENCE							
INSIDE	INSIDE	INSIDE	INSIDE	INSIDE	INSIDE	INSIDE	INSIDE
RIGHT HAND	RH	LEFT HAND	LH	RIGHT HAND ACTIVE LH ASTRAGAL	RH ACT	LEFT HAND ACTIVE RH ASTRAGAL	LH ACT
INSIDE	INSIDE	INSIDE	INSIDE	INSIDE	INSIDE	INSIDE	INSIDE
RIGHT HAND REVERSE	RHR	LEFT HAND REVERSE	LHR	RIGHT HAND REVERSE ACTIVE RH ASTRAGAL	RHR ACT	LEFT HAND REVERSE ACTIVE LH ASTRAGAL	LHR ACT