

B15

IMO

SPECIFICATIONS

Frame	16GA. Cold-rolled steel
Door	18GA. 1 3/4-in thick
Paint	Prime painted
Hinges	Stainless Steel Sealed Ball-bearings
Insulation	Marine Mineral Wool
Lock	Cylindrical Lock Grade 2

OPTIONS

Door Types	F; L; V; VL; VKO
Frame	14GA.
Paint	Baked Enamel
Stainless Steel	Type 316L ASTM A240 / A240M
Galvanized Steel	ASTM A653/A653M-A60
Vision Panel	Contraflam
Hinge	Stainless Steel Continuous Pin and Barrel w/SS Bearings
Lock	Mortised Lock
	Stainless Steel Panic Device
Customizations	Size, Hardware, Features, and Weather-tight Applications
Louver	Stainless Steel 300 sq. CM Free Air

CERTIFICATIONS

IMO / FTP
 U.S.C.G. #164.136/103/0
 ABS #22-2215388-PDA


DeanSteel Manufacturing Company
 931 S. Flores Street
 San Antonio, TX 78204

P 800.825.8271
 F 210.226.0913
www.DeanSteel.com




MADE IN AMERICA
 AND VETERAN OWNED


Door Types

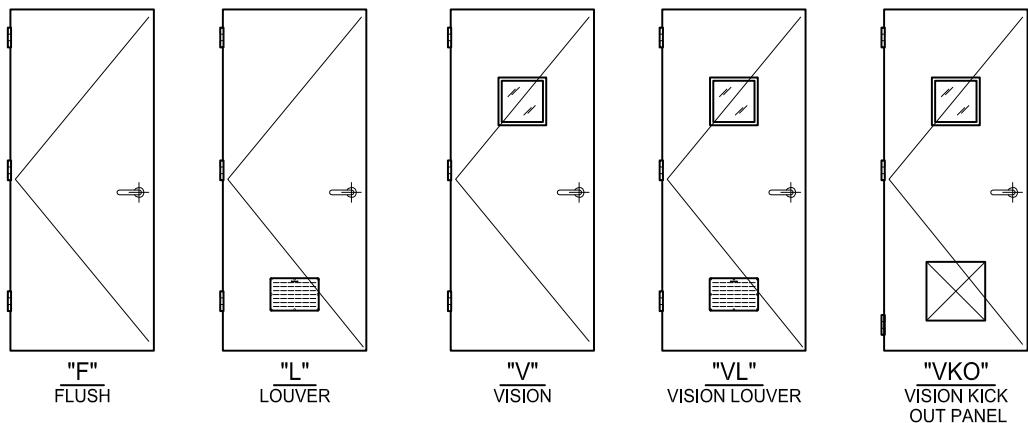

Frame Elevations

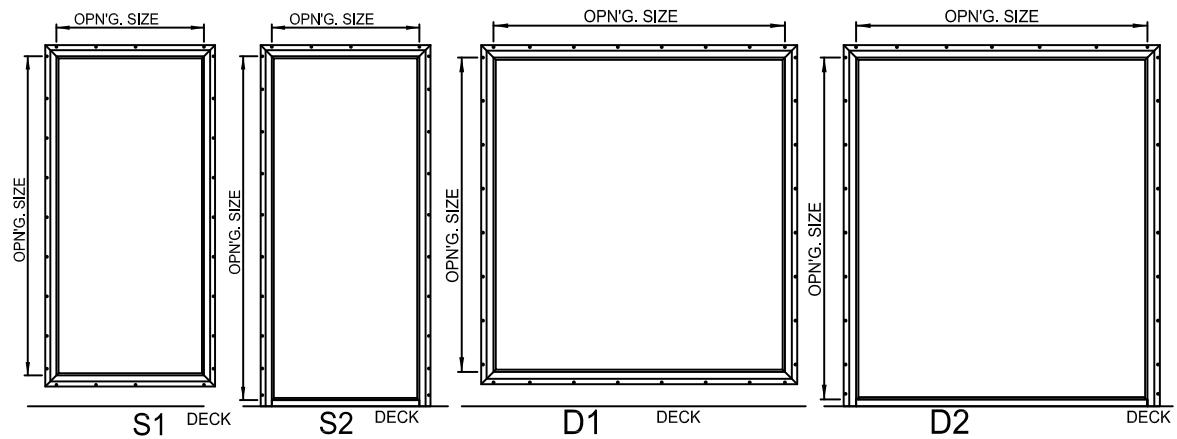

Frame Types

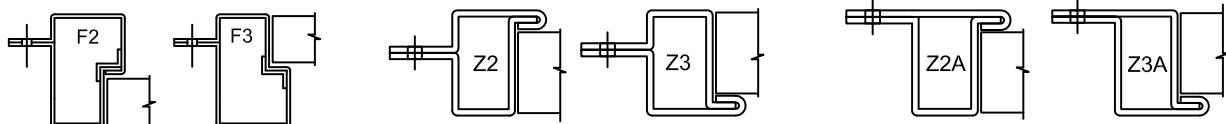

FLANGE MOUNTED FRAMES

DOOR HANDING CHART						NOTE : ALWAYS USE THE KEY SIDE OF THE DOOR FOR REFERENCE
SINGLE DOORS			PAIR OF DOORS			
INSIDE RIGHT HAND F2 or Z2 IN SWING ONLY	INSIDE LEFT HAND LH	KEY	INSIDE RIGHT HAND ACTIVE LH ASTRAGAL	INSIDE LEFT HAND ACTIVE RH ASTRAGAL	RH ACT LH ACT	
INSIDE RIGHT HAND REVERSE F3 or Z3 OUT SWING ONLY	INSIDE LEFT HAND REVERSE LHR	KEY	INSIDE RIGHT HAND REVERSE ACTIVE RH ASTRAGAL	INSIDE LEFT HAND REVERSE ACTIVE LH ASTRAGAL	RHR ACT LHR ACT	