

DSLB-4

Blast Resistant

SPECIFICATIONS

Frame	14 GA. Cold-rolled steel
Door	14 GA. Cold-rolled steel; 1-25/32 inches thick ASTM A1008 / A1008M
Blast Resistance	From 7 psi and very long durations, up to 15 psi with a duration of 10 milliseconds or less
Paint	Prime Painted
Hinges	(3) 5" Heavy Duty NRP Butt Hinges with SS Bearings
Lock	Dependent on blast requirements Single or 3-point Mortise Lock

OPTIONS*

Door Types	F, N, V, G and Pairs
Stainless Steel	Type 316L or Type 304 ASTM A240 / A240M
Galvanized Steel	ASTM A653 / A653M – A60
Vision Panel	DSM Proprietary
Fire Rated	Up to 3 hours for Flush Doors Up to 90 minutes with Vision Panel
Ballistic Resistant**	Up to Level 8
Hinges	Stainless Steel Continuous Pin & Barrel with SS Bearings
Customizations	Size, Hardware and Features

* Some options are mutually exclusive

** Special door construction

INDEPENDENT VERIFICATION
AND QUALIFICATION TESTING

Architectural Testing, Inc.

Baker Engineering and Risk Consultants, Inc.


DeanSteel Manufacturing Company
931 S. Flores Street
San Antonio, TX 78204

P 800.825.8271
F 210.226.0913
www.DeanSteel.com



MADE IN AMERICA
AND VETERAN OWNED

Door Types

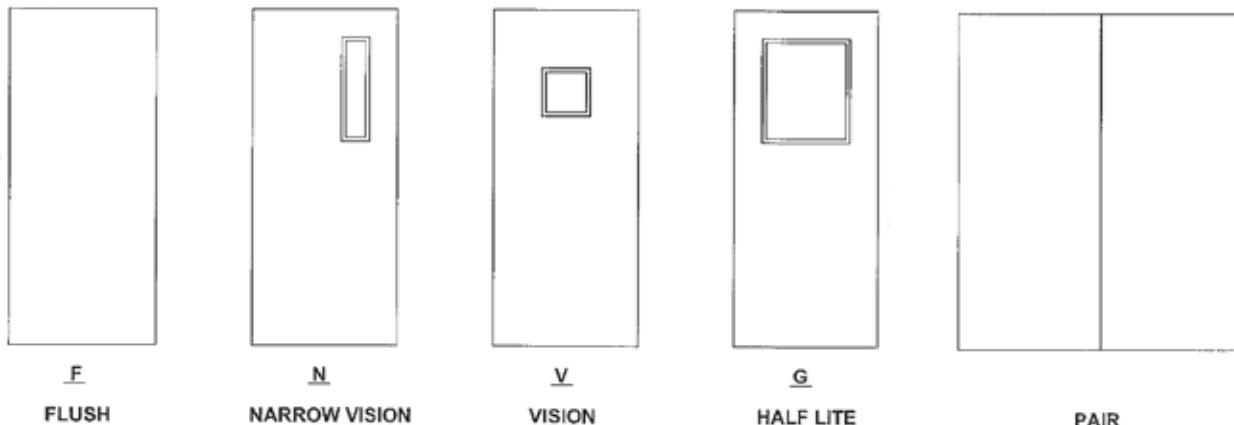

Frame Types

