

The logo for DeanSteel, featuring the company name in a bold, sans-serif font. The letters 'D', 'E', 'A', 'N', 'S', 'T', 'E', 'E', 'L' are arranged in a way that the 'S' and 'T' are slightly larger and more prominent, creating a modern, industrial look.The logo for SV, consisting of the letters 'S' and 'V' in a bold, sans-serif font, enclosed within a square border.

DOORS

Hollow Metal Doors

FIRE RATED

SPECIFICATIONS

Door	18 GA. Cold-rolled Steel ASTM A1008 / A1008M
Door Thickness	1-3/4"
Paint	Prime Painted
Hinge Prep	Non-handed 4-1/2" 7 GA. Can accommodate heavyweight hinges
Construction	Perimeter Channels with Center Edge Seam Square Edges and Non-Handed
Channels	Top & Bottom inverted 16 GA. Vertical Edge Channels 16 GA.
Insulation	ROCKWOOL SEAROX SL620
Closer Reinforcement	14 GA Cold-rolled Steel

OPTIONS*

Door Types	F, N, V, G, FG
Door Sizes	2'-0" x 6'-8" up to 4'-10" x 10'-0"
Steel Gauges	18GA., 16 GA., 14GA.
Stainless Steel	Type 316L ASTM A240 / A240M
Galvannealed Steel	ASTM A653 / A653M – A60
Lock Preps	161, 86 edge and RIM / SVR / CVR
Bullet Resistant	Up to Level 8 (SPECIAL CONSTRUCTION)
Fire Rated	Up to 3-Hour

* Some options are mutually exclusive

INDEPENDENT VERIFICATION AND QUALIFICATION TESTING

Southwest Research Institute
UL752

UL / Intertek-Warnock Hersey
3 Hour Fire Resistant

Built to SDI Specifications
ANSI A250.8





DeanSteel Manufacturing Company
931 S. Flores Street
San Antonio, TX 78204

P 800.825.8271
F 210.226.0913
www.DeanSteel.com



MADE IN AMERICA
AND VETERAN OWNED

Door Types

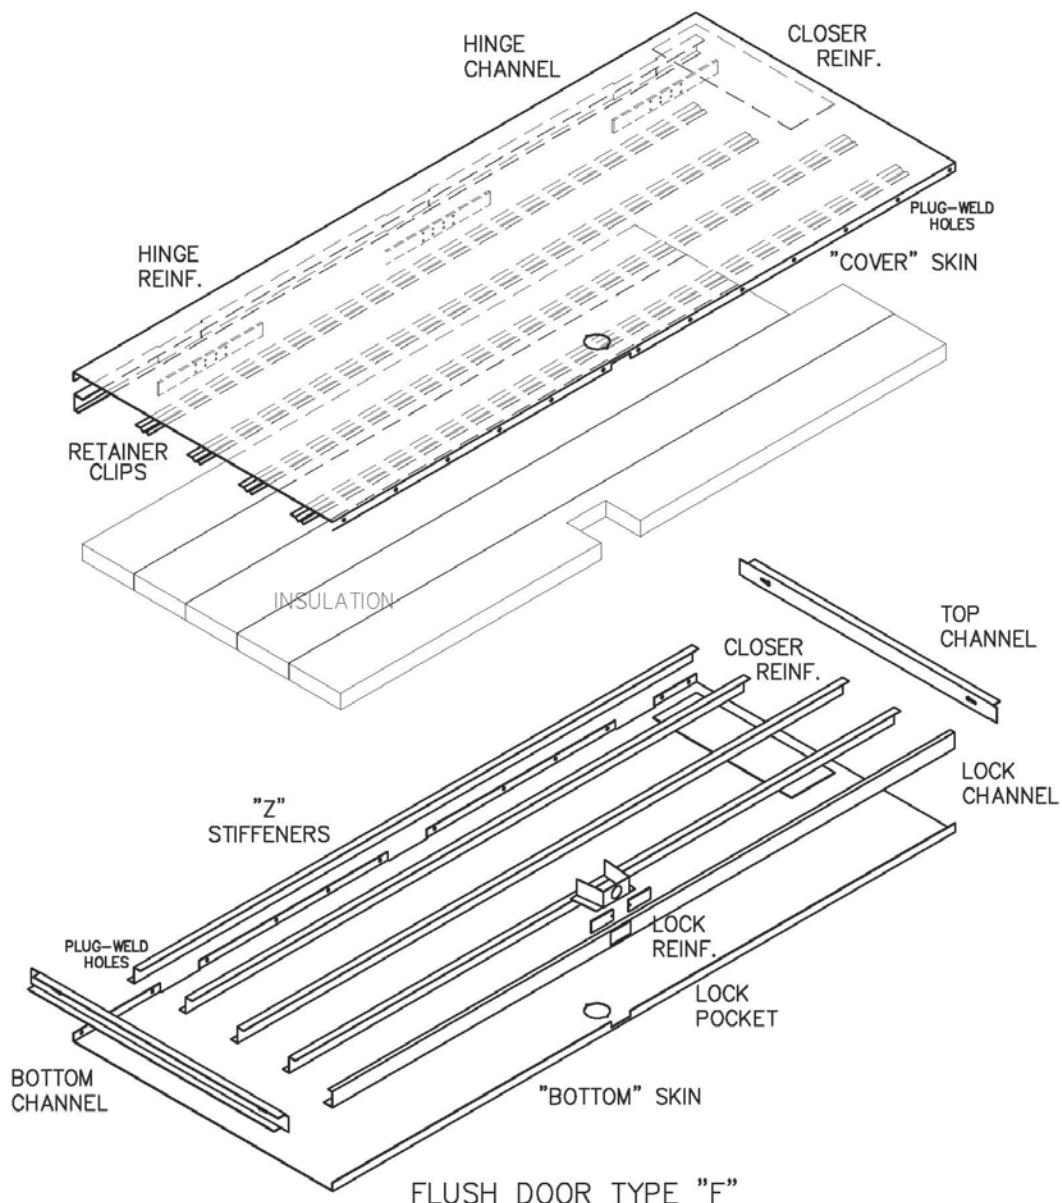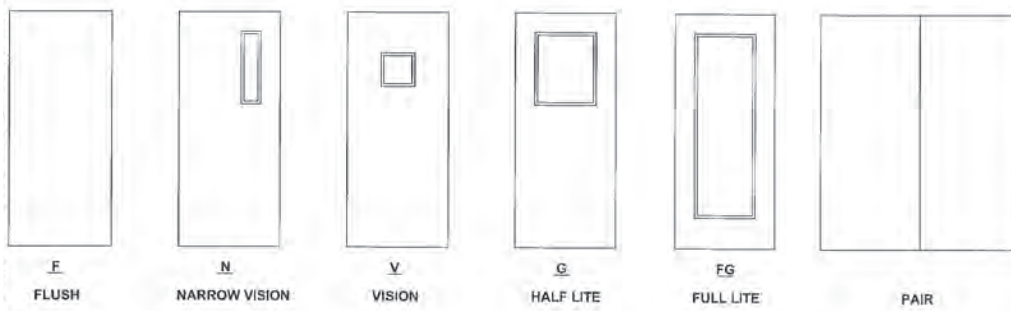

FLUSH DOOR TYPE "F"
VERTICALLY STIFFENED DOOR ASSEMBLY