

Hollow Metal Doors

FIRE RATED

SPECIFICATIONS

Door	18 GA. Cold-rolled Steel
Paint	Prime painted
Hinge Prep	Non-handed 4-1/2" 7 GA. Can accommodate heavyweight hinges
Construction	Laser-Welded Edge Seam
Channels	16 GA. Inverted Top and Bottom
Insulation	Polystyrene Core
Top Cap	18 GA. Flush
Edges	Square hinge and lock edges
Closer Reinforcement	14 GA. Cold-rolled Steel

OPTIONS

Door Types	Flush;
Lock Preps	161, 86 edge and RIM / SVR
Galvannealed Steel	ASTM A653 / A653M-A60

CERTIFICATIONS

3 Hour Intertek / Warnock Hersey,
UL 10(b) (2008): NFPA 252 (2022):
UL 10(b) Revision 1 (2009): UL 10(c) (2016):
Ed.3(R:27 May 2021) CAN / ULC S104 (2015):
Built to SDI Specifications ANSI A250.8



DeanSteel Manufacturing Company
931 S. Flores St.
San Antonio, TX 78204



P 800.825.8271
F 210.226.0913
www.DeanSteel.com



**MADE IN AMERICA
AND VETERAN OWNED**

Door Dimensions

3068 Door

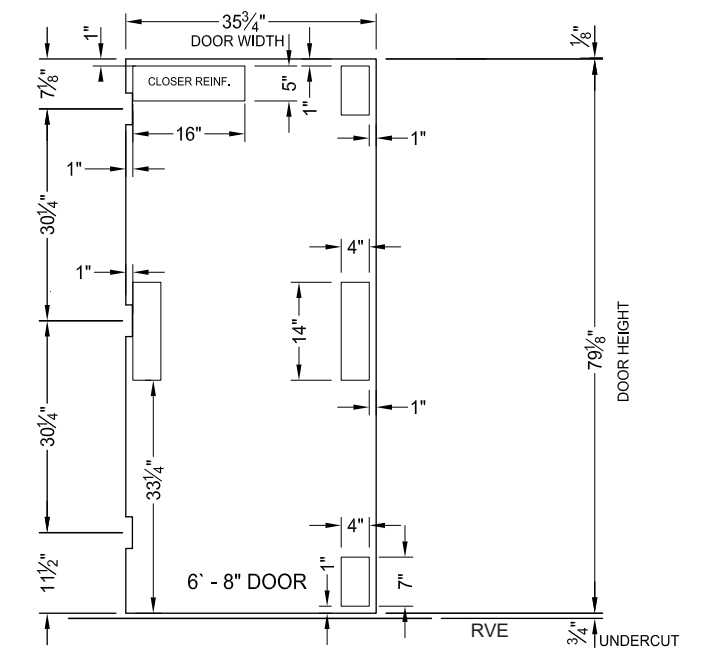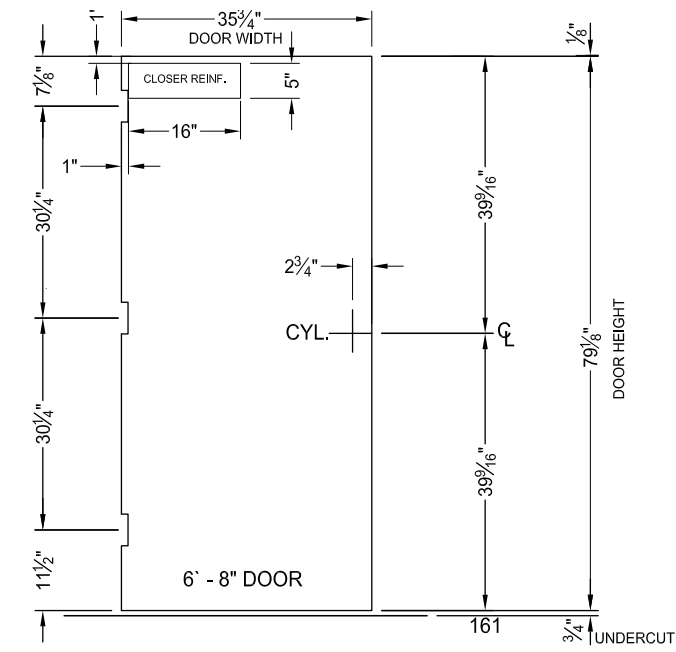

3070 Door

