

# Weathertight Pilot Barge Door

## SPECIFICATIONS

<b>Material</b>	Type 304-SS ASTM A240/A240M
<b>Frame</b>	16GA. Flanged 4-Sided "S1" Frame Elevation with F3-Open Profile
<b>Door</b>	16GA. 1 3/4-in. thick
<b>Vision Panel</b>	"GR" Door Type with Tempered Glass
<b>Finish</b>	Matte
<b>Insulation</b>	Marine Mineral Wool
<b>Hinges</b>	4-1/2" x 4-1/2" Stainless Steel Sealed Ball-bearings
<b>Lock</b>	Single-Point Mortise Lock
<b>Weathertight System</b>	Adjustable Surface-Applied Gasket (1/4" Adjustment) Drip Cap at Frame Head Door Bottom with Integrated Drip Ledge

## OPTIONS


<b>Material</b>	Type 316L-SS ASTM A240 / A240M
<b>Frame</b>	14GA Flanged 3-Sided "S2" Frame Elevation with B-Sill F3-Closed Frame with Insert Plate D3 Frame for Secondary Screen Door
<b>Door Types</b>	GR2 - Full Glass with 2 Panes
<b>Hinge</b>	Stainless Steel Continuous Pin and Barrel Hinge
<b>Vision Panel</b>	Square Corner Window with Steel Trim for CFR-46 Fire Rating
<b>Screen Door</b>	1 3/8-in. Stainless Steel Screen Door Installed in Secondary Rabbet with Aluminum Screen & Single-Point Mortise Lock
<b>Dogs</b>	Stainless Steel Dogs with surface applied wedge






## Weathertight Pilot Barge Door

### Door Types

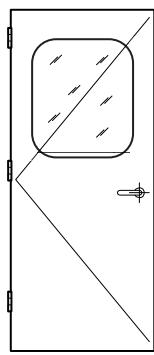


"GR"  
HALF GLASS WITH  
ROUNDED CORNERS

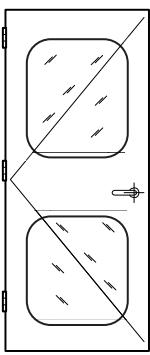


"GR2"  
FULL GLASS WITH  
TWO PANES


### Frame Elevations

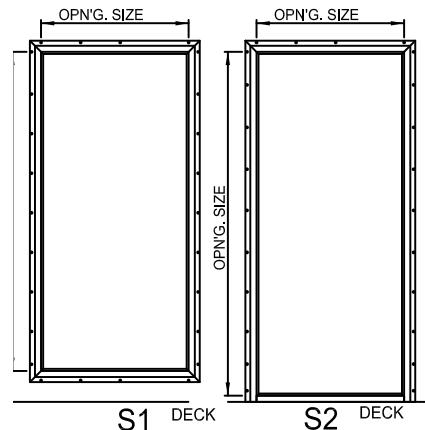


### Frame Types




F3-OPEN



F3-CLOSED

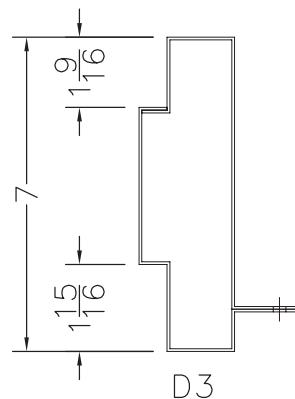

D3



B-SILL

### Door Handing Chart

SINGLE DOORS			
	KEY		KEY
EXTERIOR OF ROOM		EXTERIOR OF ROOM	
RIGHT HAND REVERSE	RHR	LEFT HAND REVERSE	LHR

### Weathertight Section

